


SWING

SPECIFICATION SHEET

GENERAL

Top layer	Thickness: 0.6 mm
Dimensions	Length: 593 mm (23-3/8 inch) Width: 121 mm (4-3/4 inch) Thickness: 10 mm (3/8 inch)
Core	High Density Fibreboard (HDF)
Bevels	4 bevels (4x mini)
Gloss	Super matt (3% +/-1)
Structure	Brushed
Backing	Real wood
Density	850 kg/m ³
Weight/sqm	9.5 kg
Connection system	Unifit X [®]
Installation type	Floating or glue-down (cf Mapei instructions on Parky website) - herringbone pattern
Standard colours	Natural Oak premium, Ivory Oak premium, Sand Oak rustic light, Sahara Oak premium, Hazel Oak rustic light, Smoked Walnut premium Other colours on demand

PRODUCT COMPOSITION

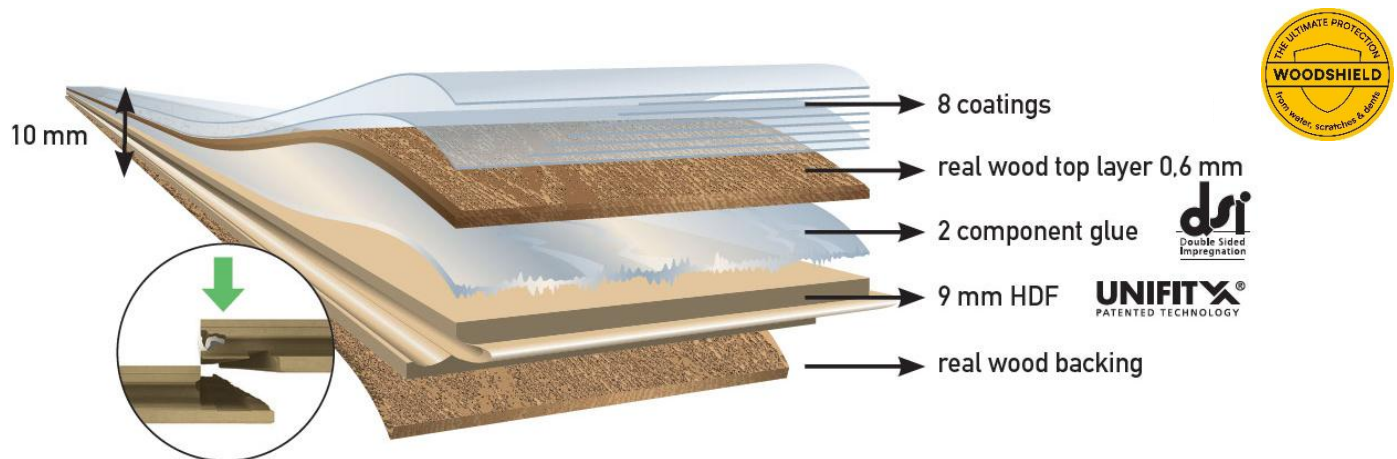

PACKAGING

Box	11 boards - surface 0.789 m ² (8.49 sq.ft) - gross weight 6.7 kg (14.8 lbs)
Pallet	126 boxes - surface 99.45 m ² (1070 sq.ft) - gross weight 858 kg (1892 lbs)

TECHNICAL SPECIFICATIONS

Domestic Usage Classification	23
Commercial Usage Classification	33
CE Certification	EN14342
Warranty	Residential limited lifetime warranty Commercial use: 10 years
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	High suitability, with a thermal resistance of 0.073 m ² K/W there is a minimal waste of energy (cf instructions)
Underfloor cooling	Suitable (cf instructions)
Thermal resistance	0.073 m ² K/W
Thermal conduction	0.14 W/mK
Fire reaction & Smoke generation	Cfl-s1
Sustainability	PEFC certified (FSC® certification on demand)
Maintenance	Weekly cleaning with 'Parky wood floor cleaner'



Promoting
Sustainable Forest
Management
www.pefc.org



The mark of
responsible forestry

Eurofins Product Testing

French VOC Regulation



Degree of March 2011 (Dev1101903D) and Arrêté of April 2011 (DEVL 1104875A) modified in February 2012 (DEVL1133129A)

French CMR components

Pass

Regulation of April and May 2009 (DEVP0908633A and DEVP0910046A)

Italian CAM Edilizia

Pass

DM 23 giugno 2022 n. 256, GURI n. 183 del 6 agosto 2022

ABG/AgBB

Pass

Ausschuss zur gesundheitlichen Bewertung von Bauprodukten (June 2021)

Belgian Regulation

Pass

Royal decree of May 2014 (C-2014/24239)

Indoor Air Comfort

Pass

Indoor Air Comfort 9.0 of June 2023

Indoor Air Comfort Gold

Pass

Indoor Air Comfort GOLD 9.0 of June 2023

BREEAM International

Exemplary level

BREEAM International New Construction v.6.0 (2021)

BREEAM NOR

Exemplary level

BREEAM-NOR v.6.1 New Construction (2023)

EU Taxonomy

Pass

Regulation (EU) 2020/852 of the European Parliament and of the Council

LEED v4.1 BETA (outside U.S.)

Pass

LEED v4.1 BETA for Building Design and Construction (February 2024)



PARKY®

wood flooring's finest

Decospan nv, Industriezone Grensland
Lageweg 33, 8930 Menen — Belgium

This version supersedes all previous versions.

MADE IN BELGIUM

DECOSPAN.
01.10.2024

tel. +32 56 52 88 49 — info@par-ky.com
www.par-ky.com